

Block-pad guidelines

Please refer to this document to ensure your order is set-up correctly.

Paper

The minimum weight we can use for block pads is 80gsm. Recycled and heavier weight papers are also available.

Printing onto the sides of the block pad


We can print 1-4 spot colours onto the sides of the block pad and also print full colour process. Full bleed can be achieved.

Tones & Tints

If the design on the side of the block pad involves a tone or a tint the job would be run as a 2 colour job. Due to the screen printing process we can achieve accurate tints or tones using 1 colour.

Printing on the sheets of a block pad

We can print 1-4 spot colours onto the sides of the block pad and also print full colour process. If the block has print on the sides we **cannot** print full bleed on the sheets.

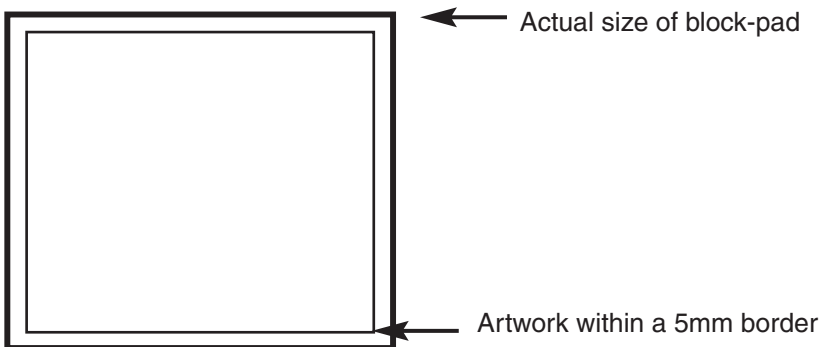

Glued Edge

The sheets are glued on one edge. If the block has printing on the sides, a slight difference in print can sometimes occur when print is applied to the glued area.

Registration

Our presses work to a tolerance +/- 0.7mm. Screen printing tolerance is 0.8mm.